

GE-ABS50-10X-OPT

GE-ABS50-MA-OPT

Dimensioni 106x90 mm H=60
Attacco guida Din, IP40



GE-ABS50-10X-OPT

Pulse	50A Duty 1/10
T On Max	10% average 200ms
Freq. Max input	0,005ms
Power supp.	24Vdc - 10A min
Input Start	24V -15mA min


Reset Alarm Red Turn-off **ABS**


GE-ABS50-MA-OPT

Pulse	12,5A Duty 1/10
T On Max	10% average 200ms
Freq. Max input	0,005ms
Power supp.	24Vdc - 10A min
Input Start	24V -15mA min

Reset Alarm Red Turn-off **ABS**

Run (GREEN)	Alarm (RED)	Over.C (YELLOW)
<input type="radio"/> No Input OFF	<input type="radio"/> OK OFF	<input type="radio"/> OK OFF
<input type="radio"/> Work BLINK	<input type="radio"/> Error over freq. ON	<input type="radio"/> Error start out overcurrent ON

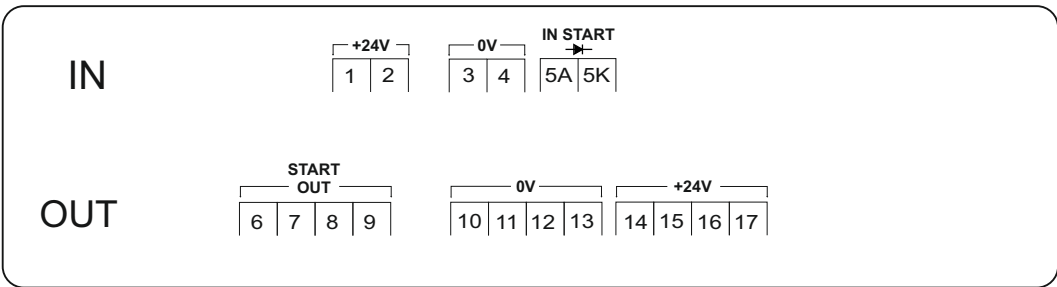

 Genesi Elettronica srl V. Bachelet, 3 41057 Spilamberto -MO- www.genesi-elettronica.it	Descrizione	GE-ABS50-10X-OPT GE-ABS50-MA-OPT	Cliente
	Disegnatore	Zoboli Mauro	Codice Cliente
	Revisore		Data
			Revisione
			27/02/2020
			01/2020