


GE-ABS80-10X-20F

Device for 24 Vdc led illuminators, to manage and control strobe vision systems

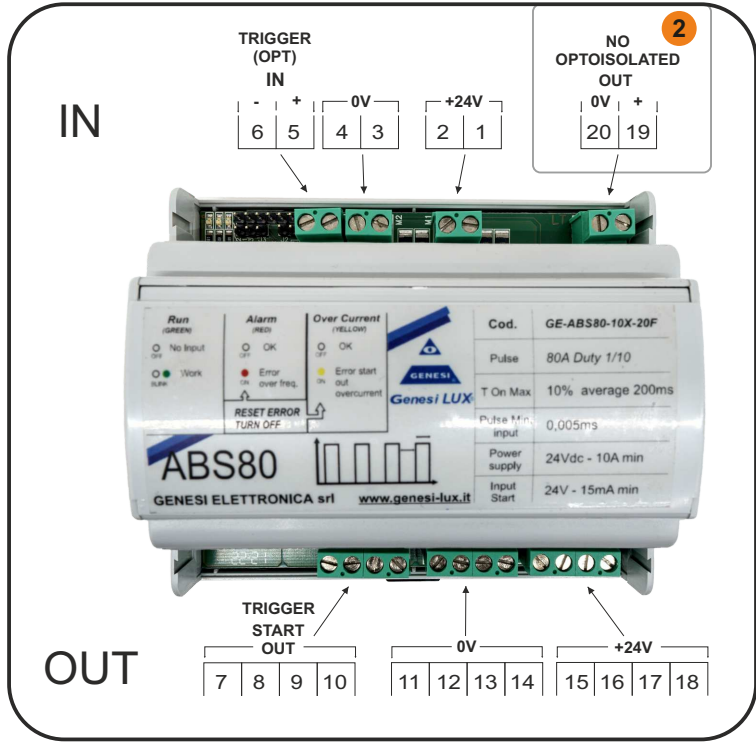

GE-ABS80-10X-20F

Pulse	80A Duty 1/10
T On Max	10% average 200ms
Pulse Min. input	0,005ms
Power supply	24Vdc - 10A min
Input Start	24V - 15mA

56mF current Buffer

<p>Run (GREEN)</p> <p>○ No Input OFF</p> <p>○ ● Work BLINK</p>	<p>Alarm (RED)</p> <p>○ OK OFF</p> <p>● Error over freq. ON</p> <p>Alarm condition:</p> <ul style="list-style-type: none"> - Led driving over 10% - High static input 	<p>Over.C (YELLOW)</p> <p>○ OK OFF</p> <p>● Error start out overcurrent ON</p>
---	---	---

- | | |
|---|--|
| 1 | -Turn off the ABS to reset the red led (Alarm) and the Yellow led (out overcurrent) |
| 2 | - The driving over 2s Trigger the alarm (Red Led) |

ATTENZIONE / WARNING

- Prodotto elettrico per uso professionale, può essere installato solo da personale qualificato.
 - Electrical device exclusively for professional use. Installation can be done by qualified personnel only.
 - In caso di danneggiamento del cavo di alimentazione, la sostituzione del medesimo deve essere eseguita esclusivamente presso la casa madre.
 - In case of power supply wire damage, its replacement has to be done at the head office exclusively.
 Perdita di GARANZIA a causa di uso improprio e manomissione del prodotto.
 Warranty loss in case of inappropriate use and tampering.



Genesi LUX® a division of
 Genesi Elettronica srl
 V. Bachelet, 3 - 41057 Spilamberto - MODENA -
 Tel. 059785566 - info@genesi-lux.it - www.genesi-lux.it



Organization with a certified ISO 9001:2015 Quality Management System